

# High Speed Xtra Low Friction (XLF) Industrial Cables

## The Low Friction Advantage in Cable Installation

General Cable's new High Speed industrial cable, with Xtra Low Friction (XLF) technology, facilitates easier and safer installation conditions. The High Speed XLF jacket technology allows for significant reductions in required pulling force, up to 80% versus standard cables. These pulling efficiencies translate into **time, labor and money savings** for the electrical contractor.

General Cable's High Speed XLF technology has been engineered into our PVC, as well as our high performance CPE and LSZH low- and medium-voltage product lines. High Speed XLF cables demonstrate General Cable's commitment to the premium and environmentally conscious market space by providing a low friction solution for a full range of commercial, industrial and utility applications.

General Cable's High Speed Xtra Low Friction industrial cables are designed to deliver reliable performance to meet the rigorous requirements associated with industrial applications. Contact your local General Cable representative for assistance in selecting the right High Speed industrial cable to meet your specific project needs.



General Cable offers the following low- and medium-voltage industrial cables with Xtra Low Friction technology:

- DuraSheath® EPR/XL-CPE 600 Volt and 2400 Volt Power Cable
- GenFree® II XLPO/XLPO 600 Volt Low-Smoke, Zero-Halogen Power Cable
- Uniblend® 5 kV to 35 kV EPR/PVC Jacketed Medium-Voltage Power Cable
- GenFree® Uniblend® 5 kV to 35 kV EPR/Low-Smoke, Zero-Halogen Jacketed Medium-Voltage Power Cable
- Uniblend® CPE 5 kV to 35 kV EPR/CPE Jacketed Medium-Voltage Power Cable
- UniShield® 5 kV to 35 kV EPR/Wire Shield, CPE Jacketed Medium-Voltage Power Cable

# High Speed Xtra Low Friction (XLF) Industrial Cables

## The proof is in the results!

To demonstrate the performance of High Speed XLF cables, General Cable conducted a study simulating worst-case conditions per NEC® guidelines, defined as a 300-foot pull with up to 360 degrees in bends. Our testing rig consisted of a 20-foot pull with four 90-degree bends, which closely correlated to the NEC guidelines.

Three separate General Cable 500 kcmil single conductor 600 V CPE jacketed cables were pulled into conduit.


1. High Speed XLF jacketed cable
2. Standard cable with pulling lubricant
3. Standard cable without pulling lubricant

All cables were pulled into a 2" electrical metallic (EMT) conduit with a conduit fill rate of 27.3%, which was verified by a licensed contractor.

## The Results

**Test results show little to no difference in required pulling force when comparing General Cable's High Speed cable to the cables installed with pulling lubricant. Tests on cable installed without pulling lubricant were stopped almost immediately, as the required pull force prevented completion of the test.**

## Conduit Pull LBF Measurement Pulling Lube vs. High Speed XLF

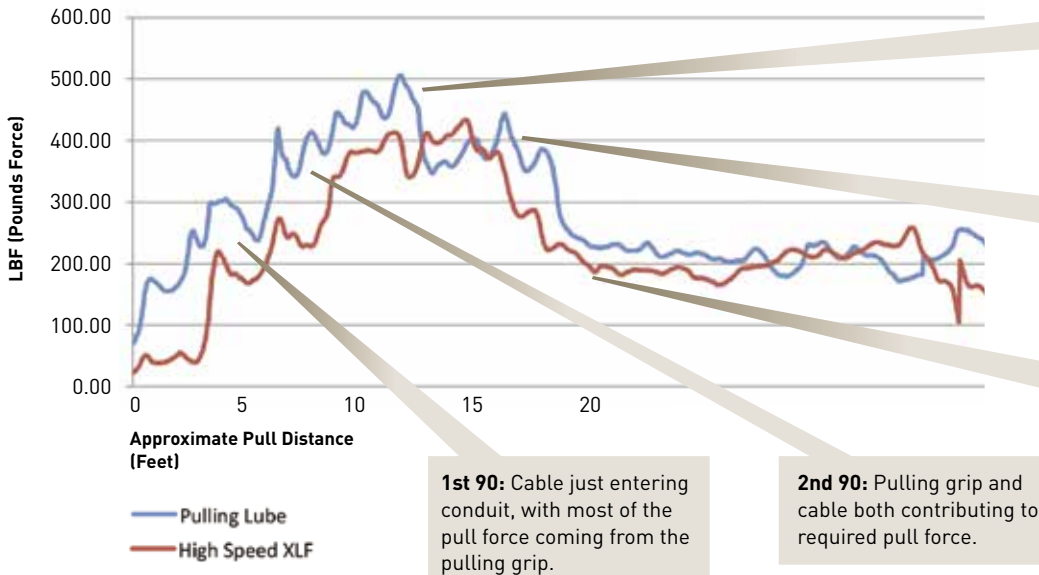

4 Tesseneer Drive, Highland Heights, Kentucky 41076-9753

GENERAL CABLE, DURASHEATH, GENFREE, UNIBLEND and UNISHIELD are trademarks of General Cable Technologies Corporation. NEC is a registered trademark of the National Fire Protection Association.

©2014. General Cable Technologies Corporation. Highland Heights, KY 41076  
All rights reserved.

Printed in USA

Telephone: 888.295.5896  
859.572.8000  
Fax: 800.547.8249  
E-mail: info@generalcable.com  
www.generalcable.com  
Form No. INS-0168-1114  
46402